




HEX ADAPTORS - STRAIGHT THREAD

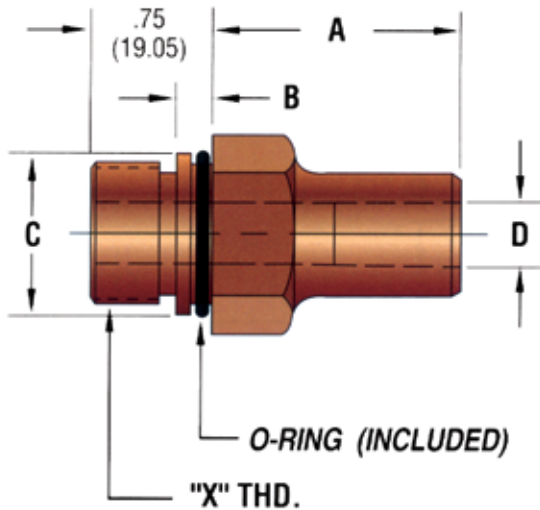

TAPER NO.	D	Minimum A		
		7/8-14	1-12	1-1/4-12
#4RW	0.463 (11.76)	0.25	0.25	0.25
#5RW	0.625 (15.88)	0.25	0.25	0.25
#6RW	0.750 (19.05)	1.13	0.25	0.25
#7RW	0.875 (22.35)	1.38	1.25	0.25

THREAD	"X"	B	C	HEX	O-RING
7/8-14	87	0.25 (6.35)	1 (25.40)	1-1/4	D-117
1-12	10	0.25 (6.35)	1.13 (28.58)	1-1/4	D-119
1-1/4-12	12	0.25 (6.35)	1.38 (34.93)	1-1/2	D-123

FIGURE 4-10 • Dimensions Shown Are: inches (mm).

EXAMPLE:

WHA - 875E12

HEX ADAPTER, 7/8-14 THD., #5 RW TAPER, ELECTRODE ADAPTER, LENGTH = 1.5 (38.10)

EXAMPLE EXPLANATION CODING

